
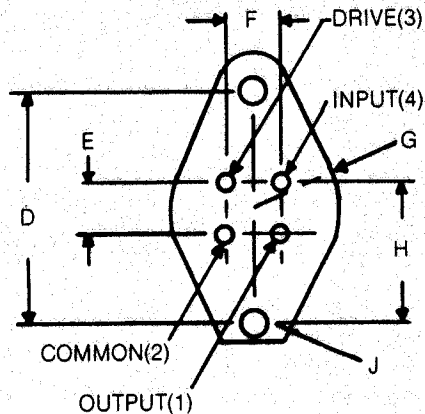


# TO-66 (4 PINS)

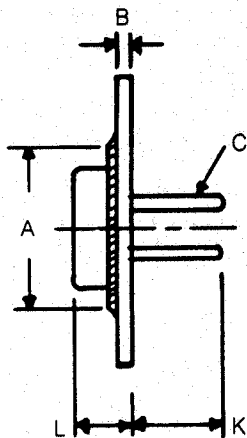

## NOTES:

1. CASE IS ELECTRICALLY ISOLATED.
2. LOADS MAY BE SOLDERED TO WITHIN 1/16" OF BASE PROVIDED TEMPERATURE-TIME EXPOSURE IS LESS THAN 260°C FOR 10 SECONDS.

	INCHES	MILLIMETERS
A	.620 MAX.	15.75 MAX.
B	.050 - .075	1.27 - 1.91
C	.028 - .034	0.71 - 0.86
D	.958 - .962	24.33 - 24.43
E	.190 - .210	4.83 - 5.33
F	.190 - .210	4.83 - 5.33
G	.350 MAX. RAD	8.89 MAX. RAD.
H	.570 - .590	14.48 - 14.99
J	.142 - .152 DIA.	3.61 - 3.86 DIA.
K	.360 MIN.	9.14 MIN.
L	.250 - .340	6.35 - 8.64